



DOUBLE CAPACITY CHAIN

Twice the number of link plates resulted in double the tensile strength, it gives this chain the name “double capacity chain”. It is primarily designed for lifting-related applications.

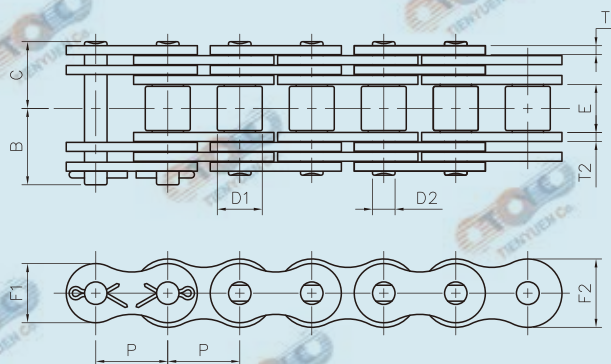

Chain No.	Pitch x Width		Roller	Pin			Link				Avg. Ulti. Tensile Strength	Approx. Weight
	P x E			D1	C	B	D2	T1	T2	F1		
	inch	mm	mm								mm	mm
60 DLP	3/4 x 1/2	19.05 x 12.70	11.91	17.65	20.20	5.96	2.39	2.39	15.64	18.09	8,600	2.23
80 DLP	1 x 5/8	25.40 x 15.88	15.88	22.80	24.35	7.94	3.18	3.18	20.82	24.13	16,350	4.17
100 DLP	1-1/4 x 3/4	31.75 x 19.05	19.05	27.90	29.75	9.54	3.96	3.96	26.03	30.16	26,650	6.43
120 DLP	1-1/2 x 1	38.10 x 25.40	22.23	34.50	36.65	11.11	4.75	4.75	31.24	36.19	35,250	9.15
140 DLP	1-3/4 x 1	44.45 x 25.40	25.40	38.20	40.55	12.71	5.56	5.56	36.44	42.22	46,000	12.00
160 DLP	2 x 1-1/4	50.80 x 31.75	28.58	45.00	47.55	14.29	6.35	6.35	41.65	48.26	58,500	15.79
180 DLP	2-1/4 x 1-13/32	57.15 x 35.71	35.71	50.80	53.85	17.46	7.14	7.14	46.86	54.29	78,000	20.48
200 DLP	2-1/2 x 1-1/2	63.50 x 38.10	39.68	55.60	60.00	19.85	7.92	7.92	52.07	60.32	112,500	25.29
240 DLP	3 x 1-7/8	76.20 x 47.63	47.63	67.80	71.60	23.81	9.53	9.53	62.48	72.39	142,000	39.00

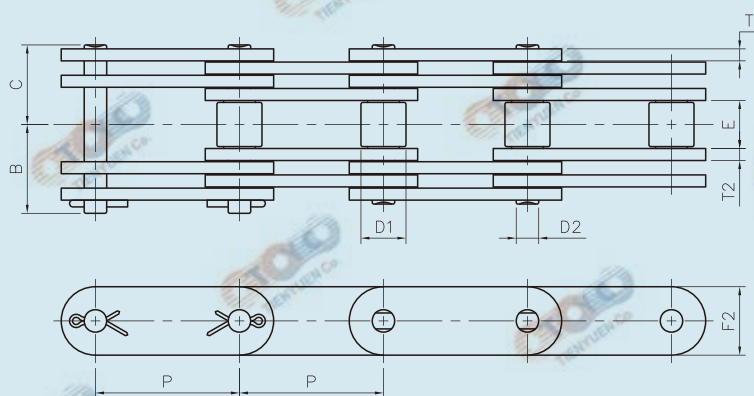

Chain No.	Pitch x Width		Roller	Pin			Link			Avg. Ulti. Tensile Strength	Approx. Weight
	P x E			D1	C	B	D2	T1	T2		
	inch	mm	mm							mm	mm
C2060H DLP	1-1/2 x 1	38.10 x 25.40	11.91	21.05	23.50	5.96	3.18	3.18	18.09	11,000	2.53

Sizes not shown on this catalog are also available upon request