



ISO AGRICULTURAL CHAIN

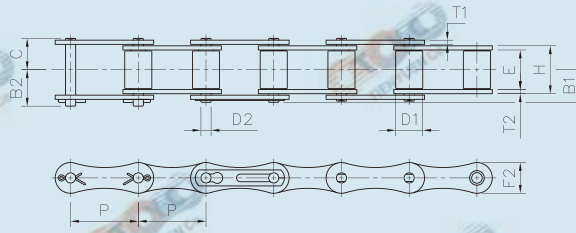


ISO 487

Chain No.	Pitch x Width	Roller D1	Pin				Link				Avg. Ulti. Tensile Strength kgf	Approx. Weight kg / m
	P x E mm		C	B1	B2	D2	T1	T2	H	F2		
S32	29.21 x 15.88	11.43	13.35	-	15.95	4.47	1.8	1.8	20.19	13.50	2,400	0.76
S42	34.93 x 19.05	14.27	17.15	-	19.85	7.01	2.8	2.8	25.40	19.80	5,600	1.60
S45	41.40 x 22.23	15.24	19.05	-	21.35	5.74	2.8	2.8	28.58	17.30	3,800	1.66
S45T	41.40 x 15.88	15.88	16.50	-	20.40	7.94	3.1	3.1	22.60	20.17	5,600	2.01
S52T	38.10 x 22.23	15.24	17.79	18.29	20.59	5.74	2.4	2.4	28.58	17.30	3,800	1.56
S55	41.40 x 22.23	17.78	19.05	-	21.35	5.74	2.8	2.8	28.58	17.30	3,800	1.80
S62	41.91 x 25.40	19.05	20.30	-	22.70	5.74	2.5	2.5	31.75	17.30	3,800	1.87

S45T and S52T follow factory specification

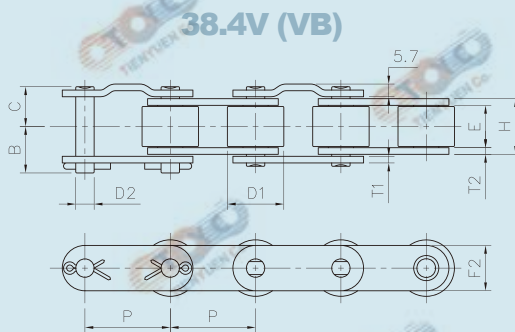

38.4V (VB)

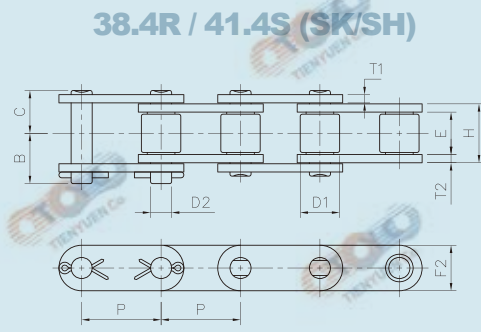

38.4R / 41.4S (SK/SH)

Non-Standard

Chain No.	Pitch x Width	Roller D1	Pin			Link				Avg. Ulti. Tensile Strength kgf	Approx. Weight kg / m
	P x E mm		C	B	D2	T1	T2	H	F2		
38.4V	38.40 x 18.00	21.00	17.07	19.97	6.92	3.0	3.0	24.50	17.30	5,000	2.31
38.4VB	38.40 x 19.05	25.40	18.11	21.11	8.28	3.0	3.0	25.40	20.40	6,000	3.26
38.4R	38.40 x 19.05	15.88	16.30	19.20	6.92	2.5	2.5	24.20	17.30	4,200	1.67
41.4S	41.40 x 20.50	15.88	18.50	21.50	7.92	3.1	3.1	27.20	20.00	5,100	2.10
41.4SK	41.40 x 20.00	15.88	17.90	20.90	8.28	3.0	3.0	26.40	20.40	6,300	2.00
41.4SH	41.40 x 22.20	17.78	19.75	23.05	8.28	3.0	3.0	28.60	20.40	6,300	2.35

Other ISO agricultural chain sizes available upon request